


# SUC-219M-1/8N-8P

HAFNER


(HU) Sarok fojtó-visszacsapó szelep, bemenő levegő fojtva - szelepbe

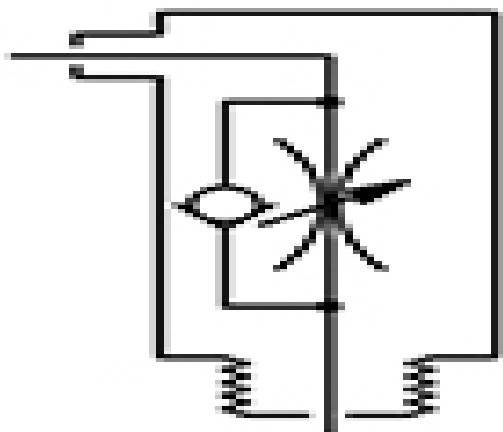

## Technische Daten


|                                            |                    |
|--------------------------------------------|--------------------|
| <b>Kivitel</b>                             | menetes            |
| <b>Material</b>                            | Messing vernickelt |
| <b>Anschlussgröße / Schnittstelle</b>      | G 1/8"             |
| <b>Medium</b>                              | Druckluft          |
| <b>Material Dichtungen</b>                 | NBR                |
| <b>Temperaturbereich</b>                   | -10°C...+80°C      |
| <b>Arbeitsdruck</b>                        | 0,2...10 bar       |
| <b>Durchflussrate (P1=6 bar, ΔP=1 bar)</b> | max. 280 l/min     |
| <b>Anschlussgröße   Steckverbindung</b>    | Ø8                 |
| <b>Anschlussgröße</b>                      | Ø8                 |

# SUC-219M-1/8N-8P



HAFNER

(HU) Sarok fojtó-visszacsapó szelep, bemenő levegő fojtva - szelepbe

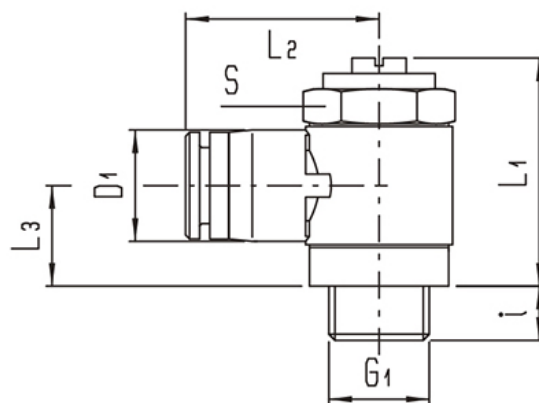

| Typnummer        | Anschlussgröße G | Schlauchgröße | i   | L1   | L2 max. | L3  | S  |
|------------------|------------------|---------------|-----|------|---------|-----|----|
| SUC-219M-M5N-4P  | M 5              | 4             | 4   | 21,5 | 17,5    | 7,5 | 8  |
| SUC-219M-M5N-6P  | M 5              | 6             | 4   | 21,5 | 18,5    | 7,5 | 8  |
| SUC-219M-1/8N-4P | G 1/8"           | 4             | 5   | 30   | 22      | 12  | 14 |
| SUC-219M-1/8N-6P | G 1/8"           | 6             | 5   | 30   | 22,5    | 12  | 14 |
| SUC-219M-1/8N-8P | G 1/8"           | 8             | 5   | 30   | 23      | 12  | 14 |
| SUC-219M-1/4N-6P | G 1/4"           | 6             | 6,5 | 32   | 24,5    | 13  | 17 |
| SUC-219M-1/4N-8P | G 1/4"           | 8             | 6,5 | 32   | 25      | 13  | 17 |